



Your Ultimate Solution



BRAND - BnR/OSC TIRES

www.osctires.com



Navigate your business journey with ease:
Introducing OSC Tires Off Highway Tires.

In the dynamic landscape of business, the path ahead is never certain. But fear not, for OSC Tires is here to accompany you on your voyage to success.

OSC Tires off-highway tires are meticulously crafted to conquer any challenge the road throws at you. Whether you're cruising through smooth terrain or tackling rugged landscapes, our tires are engineered to elevate your performance.

Drawing from decades of tire expertise, OSC Tires is the culmination of our passion for innovation and excellence. With two successful off-highway tire brands under our belt, we bring a wealth of knowledge to the table. We make sure that every tire is designed to perfection with it being available at the best market price ensuring highest channel partner profitability in the industry.

So, let's embark on this journey together. With OSC Tires by your side, there are no limits to where your business can go. Welcome aboard!



BRAND - BnR/OSC TIRES

www.osctires.com



Our Brand Commitments:

- Customer Centricity
- Committed to Long-Term Partnerships
- Delivering High-Value Products
- Offering a Diverse and Expanding Range
- Tailored Tires for Every Application
- Unwavering Focus on Consistent Quality
- Optimizing Channel Partner Profitability

BRAND - BnR/OSC TIRES

www.osctires.com



Our CORE Values:


- Own the Road
- Respect Every Mile
- Never Tire of Perseverance
- Unite as Go-Getters
- Empathy in Every Revolution

BRAND - BnR/OSC TIRES

www.osctires.com



TIRE SIDEWALL MARKINGS

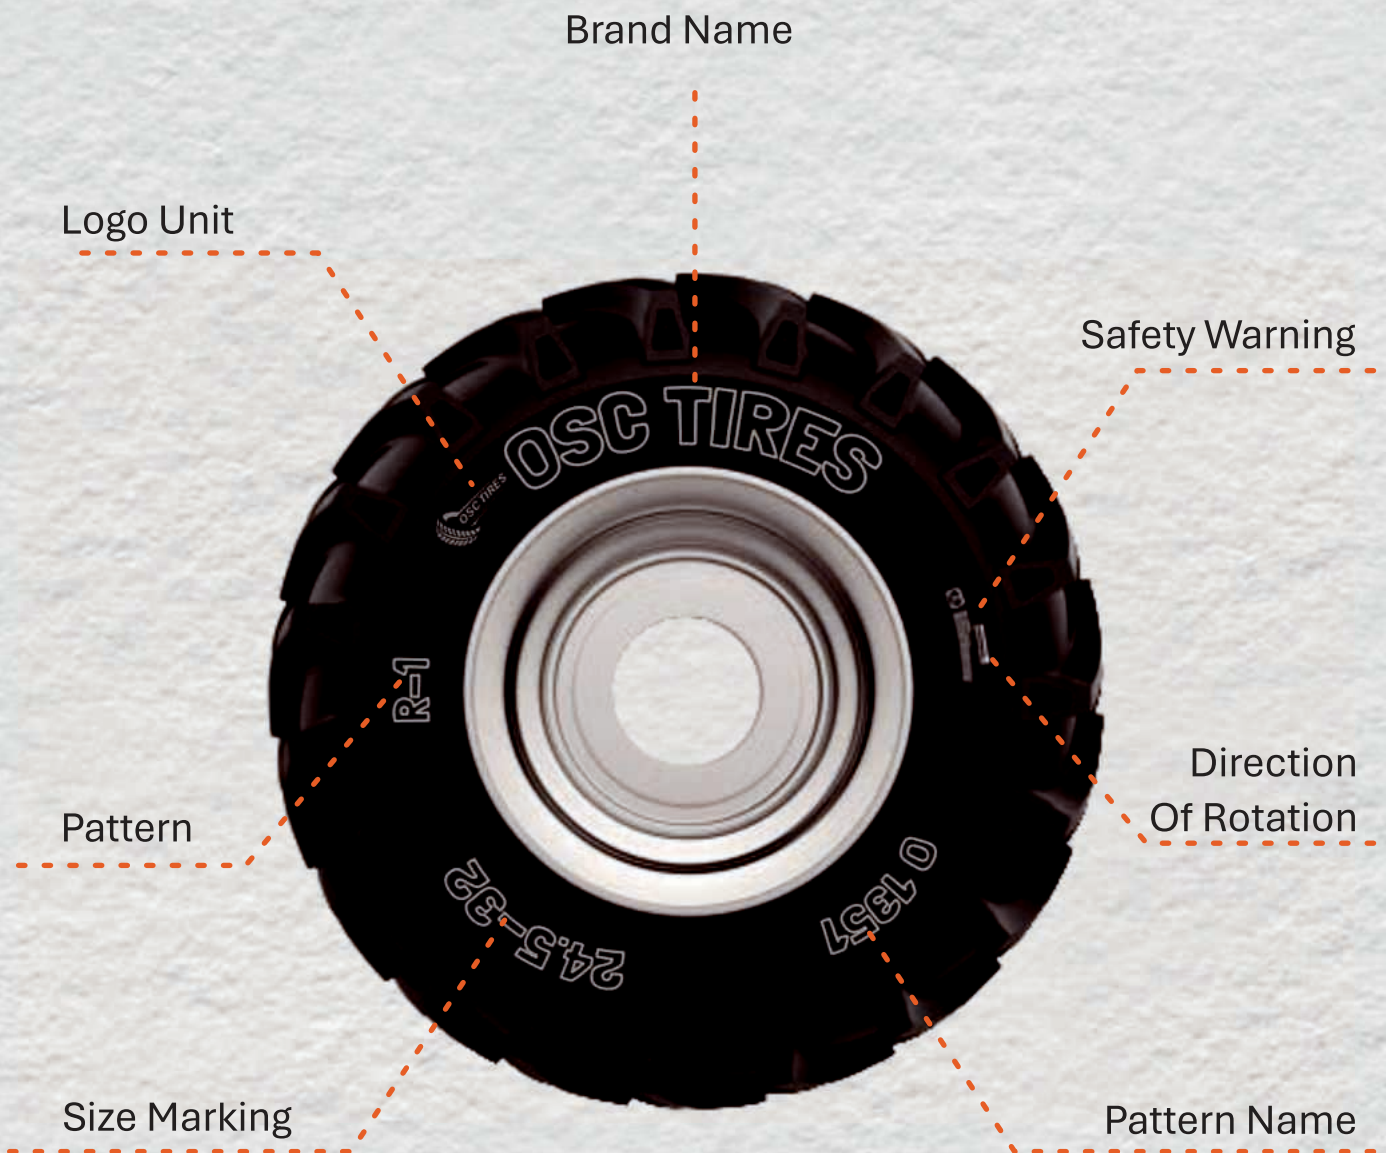

BRAND - BnR/OSC TIRES

www.osctires.com



TRACTOR FRONT TIRES



F2

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
6.00-16	F-2	8	4.5	TL	165/6.5	735/28.9	346	2190	16	615/1350	4.70/68	91/A8	40/25
7.50-16	F-2	8	5.5	TL	207/8.1	810/31.9	379	2414	17	775/1710	3.85/56	99/A8	40/25
10.00-16	F-2	10	8	TL	275/10.8	890/35	410	2682	28	1215/2680	3.80/55	115/A8	40/25
11.00-16	F-2	10	10	TL	310/12.2	970/38.2	448	2890	28	1360/3000	3.50/51	119/A8	40/25
6.00-16	3-Rib Notch	10	4.5	TL	170/6.7	740/29.1	345	2205	20	710/1560	5.20/75	99/A8	40/25
6.00-16	Rib Notch	10	4.5	TL	170/6.7	740/29.1	345	2205	20	710/1560	5.20/75	99/A8	40/25

BRAND - BnR/OSC TIRES

www.osctires.com



AGRICULTURE TIRES R-1 Rear



Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
5.00-12	R-1	6	4.5	TT	130/5.12	580/22.85	272	1750	16	307/675	2.80/30	67/A6	30/19
6.00-12	R-1	6	5.5	TT	160/6.3	635/25	298	1953	16	400/800	2.60/30	76/A6	30/19
8.3-24	R-1	6	8	TT	211/8.30	995/39.17	473	3032	26	810/1782	2.30/34	112/A6	40/25
9.5-24	R-1	8	10	TT	230/9.1	1055/41.5	495	3105	26	1120/2470	2.80/41	112/A6	40/25
11.2-24	R-1	8	4.5	TL	284/11.2	1090/42.9	509	3205	25	1250/2760	2.40/35	116/A6	30/19
11.2-28	R-1	8	4.5	TT	285/11.2	1205/47.9	563	3694	26	1320/2904	2.40/5	118/A6	30/19
12.4-24	R-1	12	TT	TT	315/12.4	1165/45.9	539	3410	27	1600/3520	3.30/48	124/A8	40/25

BRAND - BnR/OSC TIRES

www.osctires.com

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
14.9-24	R-1	12	TT	TT	375/14.8	1265/49.8	583	3719	26	200/4400	2.60/38	132/A8	40/25
15.5/80-24	R-1	16	TL	TL	385/15.2	1260/49.6	566	3655	38	3110/6850	4.00/58	159/A8	40/25
12.4-28	R-1 Heavy Duty	12	TT	TT	318/12.5	1270/50	589	3805	38	1650/3640	2.50/36	125/A6	30/19
13.6-28	R-1 Heavy Duty	14	TT	TT	340/13.4	1330/52.4	615	3940	38	1650/3640	2.70/39	131/A6	30/19
14.9-28	R-1 Heavy Duty	12	TT	TT	380/15	1370/53.9	630	4055	38	2120/4670	2.30/33	134/A6	30/19
16.9-28	R-1	12	TT	TT	430/16.9	1420/55.9	655	4310	31	2240/4930	2.10/30	136/A8	40/25
16.9-30	R-1	12	TT	TT	430/16.9	1485/58.5	688	4366	33	2500/5520	2.30/34	140/A8	40/25
16.9-34	R-1	12	TT	TT	429/16.9	1585/62.4	736	4838	39	2500/5510	2.20/32	140/A8	40/25
16.9-38	R-1	12	TT	TT	429/16.9	1685/66.3	788	4954	33	2575/5680	2.30/33	140/A8	40/25
18.4-26	R-1	12	TT	TT	460/18.1	1470/57.87	650	4250	33	2650/5840	2.20/32	142/A8	40/25
18.4-30	R-1	14/16	TT	TT	460/18.1	1545/60.8	714	4542	36	3250/7160	2.50/36	149/A8	40/25
18.4-34	R-1	10/12	TT	TT	467/18.4	1650/65	768	4866	38	3450/7610	2.60/38	151/A6	40/25
11.2-38	R-1	8	TL	TL	284/11.2	1445/56.9	686	4242	26	1500/3310	2.30/33	122/A6	30/19
18.4-38	R-1	12	TT	TT	465/18.3	1750/68.9	815	5145	32	3250/7150	2.20/32	149/A8	40/25
23.1-30	R-1	12	TT	TT	600/23.6	1700/66.92	773	5217	42	3875/8540	1.70/25	155/A6	30/18.75
24.5-32	R-1	14	TT	TT	622/24.5	1805/71	807	5343	39	5300/11685	2.3/33	166/A6	30/18.75

BRAND - BnR/OSC TIRES

www.osctires.com



IRRIGATION DRIVE



Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
11.2-24	Irrigation	8	W10	TL	284/11.2	1090/42.9	509	3205	25	1250/2760	2.40/35	116/A6	30/19
11.2-24	Irrigation ND	8	W10	TL	284/11.2	1090/42.9	509	3205	25	1250/2760	2.40/35	116/A6	30/19
14.9-24	Irrigation	8	W13	TL	375/14.8	1245/49	575	3660	26	1800/3970	1.80/26	128/A6	30/19
14.9-24	Irrigation ND	8	W13	TL	375/14.8	1245/49	575	3660	26	1800/3970	1.80/26	128/A6	30/19
11.2-28	Irrigation	8	W10	TT	285/11.2	1205/47.5	563	3694	26	1320/2904	2.40/35	118/A6	30/19
11.2-38	Irrigation	8	W10	TL	284/11.2	1445/56.9	636	4242	26	1500/3310	2.30/33	122/A6	30/19

BRAND - BnR/OSC TIRES

www.osctires.com



SKID STEER TIRES L-2



L2

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
10-16.5	L-2	10	8.25	TL	268/10.5	770/30.3	356	2286	18	2120/4680	5.20/75	134/A2	10.00/6.00
12-16.5	L-2	12	9.75	TL	314/12.4	840/33.1	381	2434	20	2900/6400	5.50/80	145/A2	10.00/6.00
14-17.5	L-2	14	10.5	TL	350/13.8	920/36.2	420	2743	22	3875/8550	5.50/80	155/A2	10.00/6.00

BRAND - BnR/OSC TIRES

www.osctires.com



SKID STEER TIRES L-5



L5

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
10-16.5	L-5	12	8.25	TL	267/10.5	790/31.1	356	2285	33	2120/4680	5.20/75	134/A2	10.00/6.00
12-16.5	L-5	14	9.75	TL	325/12.8	850/33.5	391	2514	35	3075/6800	5.50/80	145/A2	10.00/6.00

BRAND - BnR/OSC TIRES

www.osctires.com



GRADER TIRES G2/L2



G2/L2

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
13.00-24	G-2	16	8.00TG SDC	TL	333/13.1	1278/50.3	582	3785	27	3350/7385	4.00/58	150/A8	40/25
14.00-24	G-2	16	8.00TG SDC	TL	362/14.3	1348/53.1	598	3962	27	3650/8047	3.70/54	153/A8	40/25
16.9-24	G-2	16	DW15L	TL	450/17.7	1320/52	590	3906	27	3900/8580	2.60/38	155/A8	40/25
15.5-25	G-2/L-2	16	12.00/1.3	TL	385/15.2	1270/50	572	3772	28	2650/5830	2.60/42	154/A8	40/25
17.5-25	G-2/L-2	16	14.00/1.5	TL	445/17.5	1330/52.3	596	3950	26	3350/7385	2.75/44		

BRAND - BnR/OSC TIRES

www.osctires.com



INDUSTRIAL R-4 TIRES



R4

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
19.5L-24	R-4	16	17	TL	490/19.29	1325/52.16	585	4031	30	4125/9090	2.90/42	157/A8	40/25
16.9-24	R-4	10	15	TL	440/17.30	1310/51.60	519	3850	27	2900/6400	2.20/32	145/A8	40/25
16.9-28	R-4	12	15	TL	440/17.30	1410/55.5	640	4145	28	3450/7600	2.60/38	151/A8	40/25

BRAND - BnR/OSC TIRES

www.osctires.com



COMPACTOR R-3 TIRES



Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
23.1-26	R-3	20	20	TL	587/23.11	1560/61.41	686	4545	25	4750/10470	2.9/42	162/A6	30/19

BRAND - BnR/OSC TIRES

www.osctires.com



IMPLEMENT I-1 TIRES



I1

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
9.5L-14	I-1	8	7	TL	235/9.3	730/28.7	326	2154	8	1090/2400	3.0/44	111/B	50/31
9.5L-15	I-1	10	7	TL	240/9.4	765/30.1	340	2242	10	1285/2830	3.70/54	117/B	50/31
11L-14	I-1	8	8	TL	256/10.7	753/29.64	333	2206	8	1120/2470	2.50/36	112/B	50/31
11L-15	I-1	10	8 LB	TL	270/10.6	770/30.3	342	2256	10	1320/2190	3.00/44	118/B	50/31

BRAND - BnR/OSC TIRES

www.osctires.com



AGRICULTURE/ALL WHEEL IMPLEMENT



AW IMPLEMENT

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
10.0/80-12	AW Implement	10	9	TL	264/10.4	700/27.6	312	2080	11	1450/3195	3.90/56	121/A8	40/25
10.5/65-16	AW Implement	14	9	TL	274/10.8	755/29.7	355	2212	8	1900/4190	5.30/77	130/A8	40/25
10.0/75-15.3	AW Implement	12	9	TL	264/10.4	760/29.9	343	2227	11	1700/3750	4.70/68	126/A8	40/25
11.5/80-15.3	AW Implement	12	9	TL	290/11.4	845/33.3	370	2473	11	2180/4805	4.10/59	135/A8	40/25
12.5/80-15.3	AW Implement	14	9	TL	310/12.2	885/34.8	387	2591	11	2650/5840	4.30/62	142/A8	40/25

BRAND - BnR/OSC TIRES

www.osctires.com



FORKLIFT



FORKLIFT

Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
5.00-8	Forklift	10	3	TT	135/5.3	467/18.4	10	1090/2403	10.0/145	111/A5	25/16
6.00-9	Forklift	10	4	TT	170/6.7	550/21.7	10	1320/2910	8.50/123	118/A5	25/16
6.50-10	Forklift	10	5	TT	185/7.3	605/23.8	17	1500/3305	7.75/112	122/A5	25/16
7.00-12	Forklift	12	5	TT	190/7.5	685/27.0	15	2060/4540	8.0/116	133/A5	25/16
8.15-15/28X9-15	Forklift	14	7	TT	220/8.7	720/28.3	17	3000/6610	10.0/145	146/A5	25/16
8.25-15	Forklift	14	6.5	TT	240/9.4	855/33.7	20	3250/7830	8.0/116	149/A5	25/16

BRAND - BnR/OSC TIRES

www.osctires.com



EARTHMOVERS E3/L3



Tyre Size	Pattern	Ply Rating	Rim Width (inch)	TT/TL	Section Width (mm/inch)	Overall Diameter (mm/inch)	Static Loaded Radius (mm)	Rolling Circum +/- 2.5% (mm)	NSD (mm)	Load Capacity (kgs/lbs)	Inflation Pressure (Bar/Psi)	Load Index	Speed (Kmph/Mph)
14.00-24	E-3	20	10	TL	365/14.4	1345/53.0	620	4050	25	8500/18739	7.0/102	182/A2	10.0/6.0
14.00-25	E-3	20	10/1.5	TL	410/16.1	1410/55.5	620	4105	25	8500/18739	7.0/102	182/A2	10.0/6.0
17.5-25	E-3	20	14	TL	435/17.1	1345/53	622	3980	25	8250/18185	5.75/83	181/A2	10.0/6.0
20.5-25	E-3	20	17.00/2.0	TL	540/21.25	1490/58.66	685	4410	26	8250/18185	3.5/51	181/A2	10.0/6.0
23.5-25	E-3	20	19.50/2.5	TL	600/23.6	1625/64	742	4810	26	10900/24030	3.75/54	191/A2	10.0/6.0

BRAND - BnR/OSC TIRES

www.osctires.com



LCV/LT



Tyre Size	Pattern	Ply Rating	40 FCL Container Capacity	Rim Width (inch)	TT/TL/TTF	Section Width (mm)	Overall Diameter (mm)	NSD (mm)	Load Capacity Single (kgs)	Load Capacity Dual (kgs)	Inflation Pressure (kpa)	Load Index (Single/Dual)	Speed Index
7.00-15	RIB	12	800	5.5	TTF	207	777	15	1050	925	515	109/105	J
7.00-16	LUG	14	750	5.5	TTF	199	802	16.5	1315	1160	655	117/113	L
7.00-16	RIB	14	750	5.5	TTF	201	792	14	1315	1160	690	117/113	J
7.50-16	LUG	16	700	6.00 G	TTF	216	830	17	1600	1400	760	124/120	K
7.50-16	RIB	16	730	6.00 G	TTF	208	820	15	1600	1400	760	124/120	K
8.25-16	RIB	16	600	6.50 H	TTF	238	858	16	1850	1750	760	129/127	K
8.25-16	LUG	16	600	6.50 H	TTF	239	859	19	1850	1750	760	129/127	K
10.00-20	RIB	18	300	7.50	TTF	286mm	1080mm	15	3050	2950	795	129/127	K

BRAND - BnR/OSC TIRES

www.osctires.com



LAWN & GARDEN TIRES



LAWN & GARDEN

Tyre Size	Pattern Code
13/500-6	O 1000
13/6.5-6	O 1000
15/600-6	O 1000
16X6.50-8	O 1000
18X8.50-8	O 1000
18X9.5-8	O 1000
20X10-8	O 1000
20X8.00-8	O 1000

Tyre Size	Pattern Code
23X9.50-12	O 1000
23X10.5-12	O 1000
24X12-12	O 1000
27X8.5-15	O 1000
13.6-16	O 1000
12-16.5	O 1000
16X7.50-8	O 1000
22X11-10	O 1000

BRAND - BnR/OSC TIRES

www.osctires.com



ADDRESS:

📍 | Corporate Office: West Karwal Nagar, New Delhi-110094

✉ | Email: info@osctires.com / sales@osctires.com

☎ | Mobile No.: +91-9818952413 / +91-8882570476

www.osctires.com